



BOMBAS VANBRO LTDA

SAPUCAIA DO SUL - RS


BRASIL

BOMBA SUMERGIBLE MODELO VBOP61


EMPLEO: POZO PROFUNDO Ø6"

(DIÁM. 140mm 50HZ 2900RPM)

TABLA DE RENDIMIENTOS

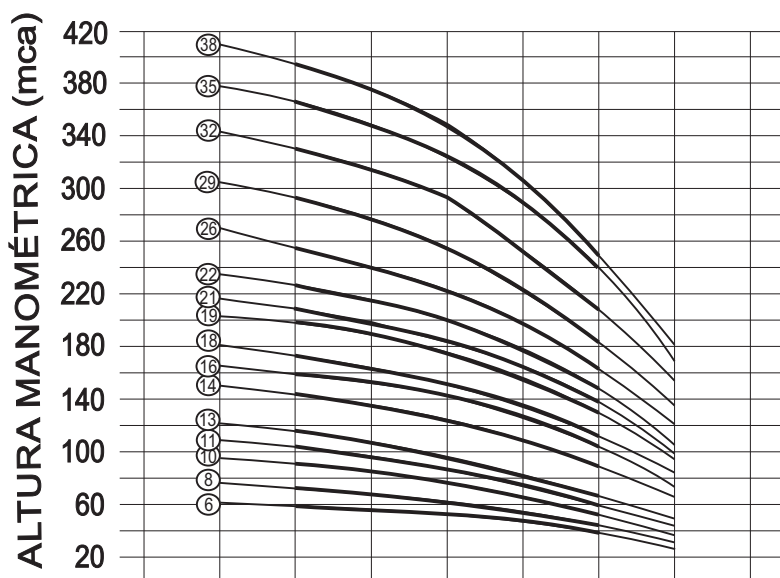

○ Nº ETAPAS

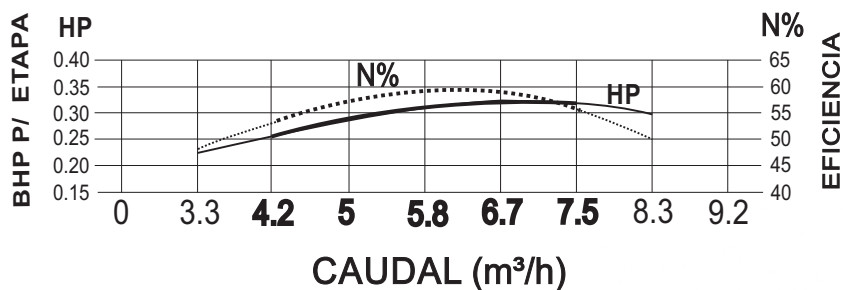

MODELO	MOTOR	E	HP	CAUDAL Y ALTURA MANOMÉTRICA TOTAL										m³/h
				0	3.3	4.2	5	5.8	6.7	7.5	8.3	9.2		
VBOP.61X.06.020.Y	VMUP	6	2.0	67.3	63.0	60.5	57.6	51.8	43.8	35.4	24.6	12.2	METROS	
VBOP.61X.08.025.Y	VMUP	8	2.5	83.3	77.2	73.5	69.6	62.4	53.1	42.6	30.7	15.4		
VBOP.61X.10.030.Y	VMUP	10	3.0	100.9	94.6	90.8	86.0	78.2	67.1	54.5	38.3	19.3		
VBOP.61X.11.035.Y	VMUP	11	3.5	116.6	108.2	103.2	98.2	87.9	73.8	60.5	44.4	23.2		
VBOP.61X.13.040.Y	VMUP	13	4.0	133.4	122.0	116.4	109.3	97.9	80.4	66.0	48.8	27.5		
VBOP.61X.14.045.Y	VMUP	14	4.5	154.1	150.3	143.8	137.6	124.3	109.7	91.3	66.1	38.3		
VBOP.61X.16.050.Y	VMUP	16	5.0	171.9	168.3	161.7	154.0	142.7	126.1	104.6	75.9	46.2		
VBOP.61X.18.055.Y	VMUP	18	5.5	184.7	180.6	172.9	164.2	151.0	134.5	110.0	82.6	51.6		
VBOP.61X.19.060.Y	VMUP	19	6.0	207.9	203.5	198.0	190.5	174.0	155.7	130.1	96.3	53.4		
VBOP.61X.21.065.Y	VMSP	21	6.5	222.6	217.7	208.7	199.4	182.8	162.1	137.5	99.2	55.2		
VBOP.61X.22.070.Y	VMSP	22	7.0	240.9	236.5	227.7	217.6	200.2	176.0	144.9	106.3	60.7		
VBOP.61X.26.080.Y	VMSP	26	8.0	277.5	270.3	258.2	246.1	222.9	198.3	166.0	120.9	70.6		
VBOP.61X.29.090.Y	VMSP	29	9.0	311.2	304.9	292.1	277.1	255.1	222.1	183.2	135.9	85.5		
VBOP.61X.32.100.Y	VMSP	32	10.0	346.0	343.2	330.4	316.0	291.9	253.6	207.9	156.0	94.6		
VBOP.61X.35.110.Y	VMSP	35	11.0	384.0	378.1	367.4	349.9	323.3	279.7	228.5	169.8	99.8		
VBOP.61X.38.120.Y	VMSP	38	12.0	415.6	409.1	395.2	376.3	348.9	304.7	248.7	181.6	103.5		