





**BOMBAS VANBRO LTDA**  
SAPUCAIA DO SUL - RS  
BRASIL

## BOMBA SUMERGIBLE MODELO VBOP42

EMPLEO: POZO PROFUNDO Ø4"  
(DIÁM. 95mm **50HZ** 2900RPM)

### TABLA DE RENDIMIENTOS

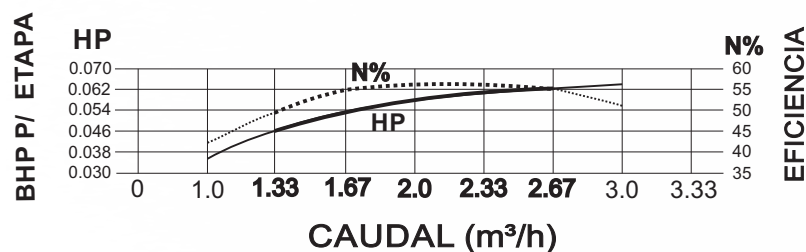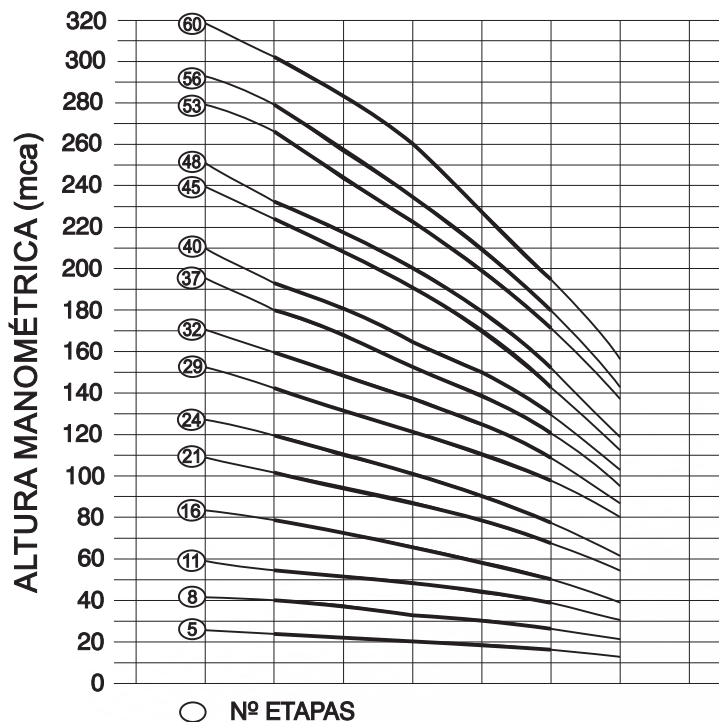

| MODELO            | E  | HP  | CAUDAL Y ALTURA MANOMÉTRICA TOTAL |       |       |       |       |       |       |       |       |        | m³/h |
|-------------------|----|-----|-----------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|--------|------|
|                   |    |     | 0                                 | 1.0   | 1.33  | 1.67  | 2.0   | 2.33  | 2.67  | 3.0   | 3.33  |        |      |
| VBOP.42X.05.003.Y | 5  | 0.3 | 26.7                              | 25.5  | 24.4  | 22.8  | 20.0  | 18.8  | 15.9  | 13.0  | 9.6   | METROS |      |
| VBOP.42X.08.005.Y | 8  | 0.5 | 44.0                              | 42.2  | 40.3  | 37.4  | 33.1  | 31.2  | 26.5  | 21.6  | 15.8  |        |      |
| VBOP.42X.11.007.Y | 11 | 0.7 | 62.0                              | 58.8  | 55.4  | 52.0  | 48.6  | 44.3  | 38.7  | 31.1  | 22.8  |        |      |
| VBOP.42X.16.010.Y | 16 | 1.0 | 87.6                              | 83.7  | 79.4  | 73.6  | 66.0  | 58.8  | 50.3  | 39.3  | 28.7  |        |      |
| VBOP.42X.21.015.Y | 21 | 1.5 | 112.6                             | 108.6 | 101.5 | 94.5  | 87.3  | 78.0  | 67.2  | 54.6  | 40.7  |        |      |
| VBOP.42X.24.015.Y | 24 | 1.5 | 132.6                             | 126.8 | 120.0 | 110.1 | 101.8 | 90.6  | 76.6  | 62.2  | 42.6  |        |      |
| VBOP.42X.29.020.Y | 29 | 2.0 | 158.6                             | 152.8 | 144.3 | 132.0 | 122.0 | 109.9 | 97.2  | 80.2  | 54.1  |        |      |
| VBOP.42X.32.020.Y | 32 | 2.0 | 177.6                             | 170.5 | 159.5 | 148.6 | 137.2 | 125.0 | 109.2 | 87.0  | 69.9  |        |      |
| VBOP.42X.37.025.Y | 37 | 2.5 | 203.8                             | 195.2 | 180.1 | 168.4 | 153.3 | 139.4 | 121.0 | 95.1  | 85.5  |        |      |
| VBOP.42X.40.025.Y | 40 | 2.5 | 219.3                             | 210.0 | 193.8 | 181.3 | 165.0 | 150.0 | 130.1 | 103.9 | 92.2  |        |      |
| VBOP.42X.45.030.Y | 45 | 3.0 | 247.8                             | 239.6 | 224.5 | 208.7 | 190.9 | 170.0 | 144.1 | 113.3 | 99.8  |        |      |
| VBOP.42X.48.030.Y | 48 | 3.0 | 262.5                             | 251.5 | 233.0 | 217.1 | 200.5 | 179.0 | 153.2 | 118.9 | 104.8 |        |      |
| VBOP.42X.53.035.Y | 53 | 3.5 | 292.5                             | 279.4 | 266.6 | 243.8 | 223.7 | 199.8 | 170.7 | 137.7 | 112.5 |        |      |
| VBOP.42X.56.035.Y | 56 | 3.5 | 307.2                             | 293.6 | 279.0 | 256.0 | 235.0 | 209.8 | 179.3 | 144.3 | 114.6 |        |      |
| VBOP.42X.60.040.Y | 60 | 4.0 | 333.4                             | 318.6 | 302.9 | 284.0 | 260.2 | 227.9 | 194.8 | 156.7 | 125.5 |        |      |